

PRASAR BHARATI
INDIA'S PUBLIC SERVICE BROADCASTER)
AKASHVANI :: HYDERABAD

** ** *

No.Hyd.1(2)/METP/2023-24 /605 to 611

Date: 14.11.2023

Address are overleaf

Sub:-Inviting Sealed Quotations for Painting of 40 Meter Self Support Tower for STL at HPT, Hayatnagar, Hyderabad - Reg.

Sir,

This Office is inviting sealed quotations for the works mentioned below:-

The bidder advised to visit the site before submitting the quotation, if required.


S.No.	DESCRIPTION OF WORK	QUANTITY
1	Labour charges for repainting of the Self Supported Steel tower of height 40 meters Self Support Tower for STL at HPT, Hayatnagar, Akashvani, Hyderabad	1 JOB
2	Specification of Paints to be Used:	
	Quantity required	
	Synthetic Enamel paint colour International Orange / Deep Orange -- (Similar to Asian paints , Berger, Nerolac, etc.,) Specification - IS2932	
	Synthetic Enamel Paint colour : White – Specification – IS2932 (Similar to Asian paints , Berger, Nerolac, etc)	
	Zinc Chromate Primer – Specification IS2074 (Anti corrosive) Thinner -- Specification – IS 800	

- 1) The contractor has to give their registration details in the quotation.
- 2) **Eligibility Criteria:**
Only those Contractors who have done similar works are eligible and they have to submit a copy of similar past works.
- 3) Along with Quotation/Bid, Bidder has to submit supporting documents for eligibility Criteria, otherwise their bid will be rejected.
- 4) 40 meters STL tower is located in HPT Hayathnagar, Akashvani Complex, where 100 Meters MW guy mast tower provided for MW Transmission. Hence, the work to be carried out daily Non-Transmission hours between 15.00 -16.50 subject to not extension of Transmission.

Contd..2.

- 5) All the tools required like wire brush, paint brushes any other material required has to be brought by the contractor himself.
- 6) The quotations should be sent in sealed envelopes addressed to the undersigned by name so as to reach on or before 30.11.2023 at 3.00 pm, the envelope should be super scribed with the following details.
 - a) Work for which quotations are enclosed.
 - b) Reference to letter of enquiry.
 - c) Due date of opening quotation.
- 7). Contractors have to sign the copy of agreement enclosed, work will be executed as per the agreement terms, as per the procedure/specifications attached (Schedules A, B, L)
- 8. Insurance Charges :** Contractor should provide insurance coverage for his workers at his own cost. The undersigned shall not be responsible for any loss of life / property belonging to the contractor and shall not pay any compensation what so ever.
- 9) Security Deposit :** Agency who are allotted the work shall deposit 5% of the cost of the work by way of DD in favour of Prasar Bharati CFDL Expenditure Account before commencement of the work.
- 10) The quotations will be opened in the office of the undersigned at 03.30 p.m. on **30.11.2023** in the presence of such contractors or their agents as may choose to attend.
- 11) The quotation submitted should remain open for acceptance for a period of 90 days from the date of opening them.
- 12) The undersigned reserves the right to reject the quotation / work, at any stage, without assigning any reason whatsoever.
- 13) Warranty:- the warranty period for the painting work of STL tower is one year from the date of completion of work. The Security Deposit amount will be released after successfully completion of warranty period.

Yours faithfully,




(S.Venkatalakshmi)

Deputy Director (Engg.)

For Deputy Director General (E).



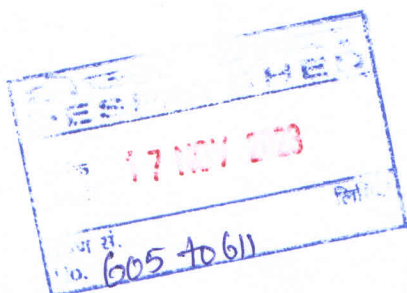

SCHEDULE - A

SPECIAL CONDITIONS FOR REPAINTING OF TOWER AT AKASHVANI, HPT, HAYATNAGAR.

1. The work is for repainting of 40 meters self supported steel tower. The details of the tower are given in the schedule : L : as enclosed
2. All the tools and materials like painting brushes, wire brushes, emery sheets, sand papers etc. for scraping, cleaning, painting etc. for the work shall be provided by the contractor and the tools shall not be loosely carried but in a bag.
3. The contractor shall maintain a record of progress of work, checks examined at various stages of execution and certificate obtained. These records duly certified by the Deputy Director (Engg.) or his representative shall be handed over to the Deputy Director (Engg.) after completion of the work
4. The daily time schedule for repainting the tower will have to co-ordinate with the Station authorities.


For Deputy Director General (Engg.)

SCHEDULE - B

SPECIFICATION FOR REPAINTING OF TOWER AT AKASHVANI, HPT, HAYATNAGAR.

Repainting of Self Supported Steel Tower with one coat of primer and two coats of required International Orange / Deep Orange / White Paint.

1. All Dust, dirt, grease, scale should be removed and the surface thoroughly cleaned.
2. No chemicals of any kind are to be used for removal of dirt, grease, scales etc.
3. Surface has to be perfectly dry
4. No dryers like lithanage or turpentine are to be used. The practice of mixing kerosene oil with paint is strictly prohibited.
5. The surface should be cleaned thoroughly and a coating of primer should be applied before painting.
6. Painting should not be done either in very cold weather (temperature less than dew point) or in unusually high humidity conditions.
7. After application of primer as described above and ensuring that the surface to be painted is dry, apply first coat of final paint. Follow up the second coat of paint after 48 hours in dry weather.
8. The painting should be done carefully so that all the corners and crevices of the tower receive the paint evenly. The paint should be evenly and uniformly applied. The tower shall be painted in alternate bands of International / Deep orange and White as per existing pattern.
9. The painting to be carried out as per existing alternate orange or white bonds.



For Deputy Director General (Engg.)

SCHEDULE : L

The Tower is located within the premises of Akashvani, High Power Transmitter, Hayatnagar, Hyderabad.

The details of tower to be painted as indicated as below :

1. Quantity in Nos. and Height of the towers : 40 meter self supported steel tower to be repainted. 1 No.
2. Requirement : Repainting of Self Supported Steel Tower is inclusive of Cable Tray connecting between transmitter building and Tower Base, Ladder and, Cable Conduits.
3. Completion Time : The work should be completed within 30 days, from the date of acceptance of the work order.


For Deputy Director General (Engg.)



1. M/S SUBHAM ENGINEERING &
CONTRACTOR
OLD NO.9, NEW NO. 19, VI STREET,
SHOZAPURAM,
AMBATTUR,
CHENNAI – 600 053
2. Sai Suriyaa Contractor & Agencies
No. 5, Angalamman Koil II Street
Maduvankarai
CHENNAI – 600 042
3. Arasu Fabricators & Erectors Cum Civil Contractors
Netaji Nagar
TUNGABHADRA DAM – 583 225
Hospet (TQ) ; Bellary (Dt)
4. M/s. Amarnath Engineering Contractor
East Vizag Camp
H.No. 147,
TUNGABHADRA DAM – 583 225
Via Hospet, Bellary distrct.
Karnataka
5. M/s. Sreenivasa Motors and Industrial Contract Services
No. 2684, Valmiki Road
G.V. V. Mohella
MYSORE – 570 002
6. M/S NIPUN SAI ENGINEERING
ENTERPRISES,
H.NO.2-2-1105/5/A/E,
TILAK NAGAR,
HYDERABAD – 500 044
7. M/s Sai Daksha Engineering Enterprises,
No.18-149/G1,
Venkateshwara Towers,
Anand Nagar,
Malkajgiri,
Secunderabad – 500 047.

8) Notice board

